

CERTIFICATE OF PRODUCT CONFORMITY

Dubai Central Laboratory Department (DCLD) of Dubai Municipality,

hereby attests that the product(s)

SPRAYED- APPLIED RIGID POLYURETHANE (PUR) THERMAL INSULATION FOAM

(Details as per the attached Scope of Certification)

manufactured by:


DESERT ROOFING & FLOORING LLC

Ras Al Khor Industrial Area, Awir, P.O. Box 185, DUBAI, UAE

have been assessed in accordance with DCLD Document Ref. No. DM-DCLD-RD-DP21-2001 (IC) "General Rules for DM third party product certification system through factory assessment" and the relevant Specific Rules, and were found in conformity with the standard specification:

ASTM C 1029 : 2010

Accordingly, DCLD hereby authorizes the above manufacturer to affix the DCL Product Conformity Mark to the above-mentioned product(s).

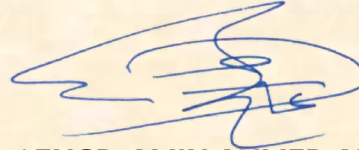

for / ENGR. AMIN AHMED AMIN

Director, Dubai Central Laboratory Department

Dubai Municipality

Verify:



Certificate No: CL13020198

Valid Until: 25 June 2019



Current Issue Date: 26 June 2018

Original Issue Date: 13 November 2013

DM-DCLD-F-IC-2031 REV 13

The attached Scope of Certification bearing the same Certificate No. forms an integral part of this Certificate.

This Certificate is an electronic document, subject to the Terms and Conditions of the Product Certification System and shall not be reproduced except in full.

DUBAI CENTRAL LABORATORY DEPARTMENT
DCL PRODUCT CONFORMITY CERTIFICATION SCHEME

SCOPE OF CERTIFICATION
FOR CERTIFICATE NO. CL13020198

Certificate Issued To	DESERT ROOFING & FLOORING LLC Ras Al Khor Industrial Area, Awir, P.O. Box 185, Dubai, UAE
Applicable Standard Specification:	ASTM C 1029:10 – Standard Specification for Spray-Applied Rigid Cellular Polyurethane Thermal Insulation Foam
Applicable Specific Rules:	RD-DP21-2112 (IC) “Specific Rules for Certification of Spray-Applied Rigid Cellular Polyurethane (PUR) Thermal Insulation (as per ASTM C 1029-10) Through Factory Assessment”.

S/N	Product Description	Brand Name	Product Details
1	Spray-Applied Rigid Polyurethane Thermal Insulation * CFC Free	DESERT ROOFING	Min. Density : 40 kg/m ³ Nominal Thickness = 50 mm k-value: 0.0242 W/(K.m) With a minimum Compressive Strength of 104 kPa

NOTE 1: This document forms part of the Certificate of Product Conformity bearing the same certificate number.

NOTE 2: The above product shall bear the DCL Conformity Mark.

NOTE 3: *- CFC Free as per declaration from the company, in accordance with the 2017 Al Sa'fat – Dubai Green Building Evaluation System

NOTE 4: Applicable only to In Situ Formed Sprayed PUR Insulation Foam used as part of combo-roofing system where in the insulation material layer is fully covered by concrete layer. Accordingly there is no requirement for testing the fire safety requirements as per clause [6.3.8] of the UAE Fire and Life Safety Code of Practice 2017

Original Issue Date : 13 November 2013

Current Issue Date : 26 June 2018

Valid Until : 25 June 2019

ARIF HUSAIN AL MARZOOQI

Head of Products Conformity Assessment Section
Dubai Central Laboratory Department