

CERTIFICATE OF PRODUCT CONFORMITY

Dubai Central Laboratory Department (DCLD) of Dubai Municipality,

hereby attests that the product(s)

LOW EMITTING MATERIALS (COATINGS, SEALANTS & ADHESIVES)

(Details as per the attached Scope of Certification)

manufactured by:


H. B. FULLER CONSTRUCTION PRODUCTS INC.

6107 Industrial Way, Houston, Texas, 7701, USA

have been assessed in accordance with DCLD Document Ref. No. DM-DCLD-RD-DP21-2001 (IC) "General Rules for DM third party product certification system through factory assessment" and the relevant Specific Rules, and were found in conformity with the standard specification:

2017 AL SA'FAT DUBAI GREEN BUILDING EVALUATION SYSTEM

Accordingly, DCLD hereby authorizes the above manufacturer to affix the DCL Product Conformity Mark to the above-mentioned product(s).

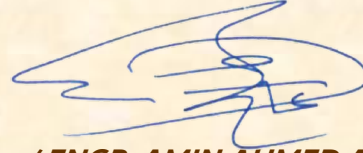

for / **ENGR. AMIN AHMED AMIN**

Director, Dubai Central Laboratory Department

Dubai Municipality

Verify:



Certificate No: CL17020491

Valid Until: 26 July 2019



Current Issue Date: 27 July 2018

Original Issue Date: 27 July 2017

DM-DCLD-F-IC-2031 REV 13

The attached Scope of Certification bearing the same Certificate No. forms an integral part of this Certificate.

This Certificate is an electronic document, subject to the Terms and Conditions of the Product Certification System and shall not be reproduced except in full.



DUBAI CENTRAL LABORATORY DEPARTMENT
DCL PRODUCT CONFORMITY CERTIFICATION SCHEME
SCOPE OF CERTIFICATION
FOR CERTIFICATE NO. CL17020491

Certificate Issued To **H. B. FULLER CONSTRUCTION PRODUCTS INC.**
6107 Industrial Way, Houston, Texas, 7701, USA

Applicable Standard Specification: 2017 Al Sa'fat Dubai Green Building Evaluation System

Applicable Specific Rules: DM-DCLD-RD-DP21-2180-(IC) Specific Rules for Certification of Low Emitting Materials (Paints, Coatings, Adhesives, Sealants) As per the 2017 Al Sa'fat Dubai Green Building Evaluation System

S/N	PRODUCT DESCRIPTION	BRAND NAME	PRODUCT DETAILS
1	SEALANTS (OTHER) <u>VOC (GBRS limit is max. 750 g/l)</u>	FOSTER 32-17 DUCT SEALANT – WB (ALSO INCLUDE ALTERNATIVE DESIGNATIONS AND SIMILAR FORMULATIONS CP-148, 32-16 & CP-181-1) LIGHT GREY COLOR	1 AND 5 GALLON PAILS, 310 ML CARTRIDGES AND 55 GALLON DRUMS
2	SUBSTRATE SPECIFIC APPLICATIONS (FIBERGLASS ADHESIVES) VOC (GBRS limit is max. 80 g/l)	FOSTER 85-70 ADHESIVE – WB (FIBERGLASS INSULATION ADHESIVE) OFF-WHITE COLOR	5 GALLON PAILS
3	ONE PACK PERFORMANCE COATINGS (COATINGS OTHER THAN PAINT FOR INTERIOR APPLICATIONS) VOC (GBRS limit is max. 140 g/l)	FOSTER 30-36AF COATING – WB (ALSO INCLUDE ALTERNATIVE DESIGNATIONS AND SIMILAR FORMULATIONS CP-137AF,30-36, CP-137, 81-42W) , WHITE COLOR	1 AND 5 GALLON PAILS
4	ONE PACK PERFORMANCE COATINGS (COATINGS OTHER THAN PAINT FOR EXTERIOR APPLICATIONS) VOC (GBRS limit is max. 140 g/l) SRI and LRV – Class 1 (See Note 3)	FOSTER 30-80AF COATING (ALSO INCLUDE ALTERNATIVE DESIGNATIONS AND SIMILAR FORMULATIONS 30-80, CP-38, CP-38AF) , WHITE & MULTI-COLORS	1 AND 5 GALLON PAILS
5	ONE PACK PERFORMANCE COATINGS (COATINGS OTHER THAN PAINT FOR INTERIOR APPLICATIONS) VOC (GBRS limit is max. 140 g/l)	Foster 30-36 HF Coating ALTERNATIVE DESIGNATIONS AND SIMILAR FORMULATIONS of like formulas Childers CP-137 HF-A, Foster 30-36 HF-A, Childers CP-137 HF, Foster 81-42 HF)	1 AND 5 GALLON PAILS



**DUBAI CENTRAL LABORATORY DEPARTMENT
DCL PRODUCT CONFORMITY CERTIFICATION SCHEME
SCOPE OF CERTIFICATION
FOR CERTIFICATE NO. CL17020491**

6	ONE PACK PERFORMANCE COATINGS (COATINGS OTHER THAN PAINT FOR INTERIOR APPLICATIONS) VOC (GBRS limit is max. 140 g/l)	Foster 40-20C Protective Coating	1 AND 5 GALLON PAILS
7	ONE PACK PERFORMANCE COATINGS (COATINGS OTHER THAN PAINT FOR INTERIOR APPLICATIONS) VOC (GBRS limit is max. 140 g/l)	Foster 30-65 Vapor-Fas WB Coating ALTERNATIVE DESIGNATIONS AND SIMILAR FORMULATIONS of like formulas Childers CP-34).	1 AND 5 GALLON PAILS
8	ONE PACK PERFORMANCE COATINGS (COATINGS OTHER THAN PAINT FOR INTERIOR APPLICATIONS) VOC (GBRS limit is max. 140 g/l)	Foster 30-33 Vapor-Out Coating ALTERNATIVE DESIGNATIONS AND SIMILAR FORMULATIONS of like formulas Childers CP-33, Childers CP-35).	1 AND 5 GALLON PAILS
9	MULTIPURPOSE CONSTRUCTION ADHESIVE (VOC (GBRS limit is max. 70 g/l)	Foster 85-60 Quick-Tack Adhesive (also include in certificate alternative designations and similar formulations Childers CP-126, Foster 97-15).	1 AND 5 GALLON PAILS

NOTE1: This document forms part of the Certificate of Product Conformity bearing the same certificate number.

NOTE2: The above product shall bear the DCL Conformity Mark.

NOTE3: For colors/Types not covered by the Scope, SRI and LRV shall be tested and classified based on the application of the product in the construction site to ensure that it meets the requirements of the 2017 Al Sa'fat Dubai Green Building Evaluation System.

SRI Class 1 (> 78) – "Can be Used in 75 - 100% of surface to be coated – Sloped or Flat Roof"

SRI Class 2 (29<78) - "Can be Used in 75 - 100% of surface to be coated – Sloped Roof"

SRI Class 3 (< 29 or untested) – "Can be Used in 0 – 25% of surface to be coated – Sloped or Flat Roof provided the remaining area is Class 1 or 2"

LRV Class 1 (=>45) – "Can be used in 75-100% of surface to be /painted/coated"

LRV Class 2 (<45 or untested) – "Can be used in 0-25% of surface to be painted/coated provided the remaining area is Class 1".

Original Issue Date : 27 July 2017

Current Issue Date : 27 July 2018

Valid Until : 26 July 2019

ARIF HUSAIN AL MARZOOQI

Director of Products Conformity Assessment Section
Dubai Central Laboratory Department