

CERTIFICATE OF PRODUCT CONFORMITY

Dubai Central Laboratory Department (DCLD) of Dubai Municipality
hereby attests that the product(s)

Low Emitting Materials

(Details as per the attached Scope of Certification)


manufactured by:

PIDILITE MEA CHEMICALS LLC
Dubai Investment Park 2, Dubai UAE

have been assessed in accordance with DCLD Document Ref. No. DM-DCLD-RD-DP21-2001 (IC) "General Rules for DM third party product certification system through factory assessment" and the relevant Specific Rules, and were found in conformity with the standard specification:

2017 AL SA'FAT DUBAI GREEN BUILDING EVALUATION SYSTEM

Accordingly, DCLD hereby authorizes the above manufacturer
to affix the DCL Product Conformity Mark on the above-mentioned product(s).

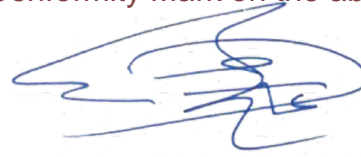

for / ENGR. AMIN AHMED AMIN
Director, Dubai Central Laboratory Department
Dubai Municipality



eiaci
مركز الاعتمادات العالمية للاعتماد
Emirates International Accreditation Centre
CB-003-PRD

Certificate No: CL18020594
Valid Until: 13/06/2020



Current Issue Date: 14/06/2019
Original Issue Date: 14/06/2018

The attached Scope of Certification bearing the same Certificate Number forms an integral part of this Certificate.
This Certificate is an electronic document subject to the Terms and Conditions of the Product Certification System and shall not be reproduced except in full.

DUBAI CENTRAL LABORATORY DEPARTMENT
DCL PRODUCT CONFORMITY CERTIFICATION SCHEME

SCOPE OF CERTIFICATION
FOR CERTIFICATE NO. CL18020594

Certificate Issued To	PIDILITE MEA CHEMICALS LLC Dubai Investment Park 2, Dubai UAE
Applicable Standard Specification:	2017 Al Sa'fat - Dubai Green Building Evaluation System
Applicable Specific Rules:	DM-DCLD-RD-DP21-2180 (IC) Specific Rules for FA Certification of Low Emitting Materials (Paints, Coating, Adhesives Sealants) as per the 2017 Al Sa'fat - Dubai Green Building Evaluation System.

S/N	Product Description	Brand Name	Product Details
1	Two Pack Performance Coating	Dr. Fixit Unilastic 811	Water Base Coating for Interior and Exterior Application VOC Limit = max. 140 g/l
		Dr. Fixit Fastflex	
		ROK Polyurethane Topcoat	Solvent Base Coating for Interior and Exterior Application VOC Limit = max. 500 g/l White Color (Note 3) SRI Class 1 (≥ 78) – “Can be Used in 75 - 100% of surface to be coated –
		ROK Aquabond	
		ROK EPSF	
		ROK Prime EPSF	
		ROK Floor EPSL	
		ROK Screed EP	
		Stauf Floorfix VEP93	

DUBAI CENTRAL LABORATORY DEPARTMENT
DCL PRODUCT CONFORMITY CERTIFICATION SCHEME

SCOPE OF CERTIFICATION
FOR CERTIFICATE NO. CL18020594

		Dr. Fixit Epoxy Putty	<i>Sloped or Flat Roof</i>
2	One Pack Performance Coating	Dr. Fixit Uniproof 5000	Water Base Coating for Interior and Exterior Application VOC Limit = max. 140 g/l White Color (Note 3) <i>SRI Class 1 (≥ 78) – “Can be Used in 75 - 100% of surface to be coated – Sloped or Flat Roof”</i>
		Dr. Fixit Polyplus CD Admix	
		Dr. Fixit Polyplus CP	
		Dr. Fixit Uniproof 4000	
		Dr. Fixit Unithane HB	
		Fevicol AC Duct King Lag coating AF 5590	
		Fevicol AC Duct King Lag coating E84	
3	Binding Primers	Dr. Fixit Unibond PVA 201	Water Base Coating for Interior and Exterior Application VOC Limit = max. 30 g/l
		Dr. Fixit Unibond SBR 202	
		ROK Bond SBR	
		ROK ASP	
		ROK DSP	
		Stauf Floorfix D 53	
		Stauf Floorfix D 63	
4	Ceramic Tile Adhesive	Roff Tile 601	Architectural Application VOC Limit = max. 65 g/l
		Roff Tile C1	
		Roff Tile C2	
		ROK Floor 25	
		Stauf Floorfix FS	
		Dr. Fixit Unigrout 505	
		Dr. Fixit Unigrout 500	
		Dr. Fixit Micro Concrete	
5	Carpet Pad Adhesive	Fevicol Floorfix Xpress	Architectural Application = 50 g/L (Max)
		Fevicol Floorfix Super TAC	

DUBAI CENTRAL LABORATORY DEPARTMENT
DCL PRODUCT CONFORMITY CERTIFICATION SCHEME

SCOPE OF CERTIFICATION
FOR CERTIFICATE NO. CL18020594

NOTE 1: This document forms part of the Certificate of Product Conformity bearing the same certificate number.

NOTE 2: The above products shall bear the DCL Conformity Mark

NOTE 3: For colors/types not covered by the Scope, SRI and LRV shall be tested and classified based on the application of the product in the construction site to ensure that it meets the requirements of the DM-AL SA'FAT.

SRI Class 1 (≥ 78) – “Can be Used in 75 - 100% of surface to be coated – Sloped or Flat Roof”

SRI Class 2 ($29 < 78$) - “Can be Used in 75 - 100% of surface to be coated – Sloped Roof”

SRI Class 3 (< 29 or untested) – “Can be Used in 0 – 25% of surface to be coated – Sloped or Flat Roof provided the remaining area is Class 1 or 2”

LRV Class 1 (≥ 45) – “Can be used in 75-100% of surface to be /painted/coated”

LRV Class 2 (< 45 or untested) – “Can be used in 0-25% of surface to be painted/coated provided the remaining area is Class 1”.

Original Issue Date: 14 June 2018

Current Issue Date: 14 June 2019

Valid Until : 13 June 2020

ARIF HUSSAIN AL MARZOOQI

Products Conformity Assessment Section Manager
Dubai Central Laboratory Department