

CERTIFICATE OF PRODUCT CONFORMITY

Dubai Central Laboratory Department (DCLD) of Dubai Municipality
hereby attests that the product(s)

In-situ Formed Sprayed PUR/PIR Thermal Insulation

(Details as per the attached Scope of Certification)

manufactured by:

PERFECT CARE TECHNICAL SERVICES

Suite 904, SIT Tower, Silicon Oasis, Dubai, UAE

have been assessed in accordance with DCLD Document Ref. No. DM-DCLD-RD-DP21-2001 (IC) "General Rules for DM third party product certification system through factory assessment" and the relevant Specific Rules, and were found in conformity with the standard specification:

BS EN 14315-1: 2013

Accordingly, DCLD hereby authorizes the above manufacturer
to affix the DCL Product Conformity Mark on the above-mentioned product(s).



for / ENGR. AMIN AHMED AMIN
Director, Dubai Central Laboratory Department
Dubai Municipality



Certificate No: CL16020397
Valid Until: 24/09/2021



Current Issue Date: 25/09/2020
Original Issue Date: 25/09/2016



The attached Scope of Certification bearing the same Certificate Number forms an integral part of this Certificate.
This Certificate is an electronic document subject to the Terms and Conditions of the Product Certification System and shall not be reproduced except in full.

DUBAI CENTRAL LABORATORY DEPARTMENT
DCL PRODUCT CONFORMITY CERTIFICATION SCHEME

SCOPE OF CERTIFICATION
FOR CERTIFICATE NO. CL16020397

Certificate Issued To:	PERFECT CARE TECHNICAL SERVICES Suite 904 SIT Tower, Silicon Oasis, Dubai, UAE
Applicable Standard Specification:	EN 14315-1 :2013 – Thermal insulating products for buildings – In situ formed sprayed polyurethane (PUR) and Polyisocyanurate (PIR) foam products
Applicable Specific Rules:	DM-DLCD-RD-DP21-2187 (IC) “Specific Rules for Certification of In-Situ Spray-applied Thermal Insulation as per BS EN14315-1”.

S/N	PRODUCT DESCRIPTION	BRAND NAME	PRODUCT DETAILS
1	Spray-Applied Rigid Polyurethane (PUR) Thermal Insulation CFC Free (see note 2)	PERFECT CARE	In Situ Formed Sprayed PUR Insulation Foam Minimum Thickness: 40 mm Core Density 50 Kg/m ³ (min) Compressive Strength = ≥ 100 kPa Dimensional stability DS (TH)2 Water Vapor Transmission = min 25 Water absorptions = 0.1kg/m ² Thermal Conductivity (max) – Initial Value: 0.026 W/(m.K); @ 35 °C & 60% RH Code: PU EN14315-1-DS(TH)2- CS (10/Y)100-MU25


NOTE 1: This document forms part of the Certificate of Product Conformity bearing the same Certificate Number.

NOTE 2: CFC Free as per declaration from the company, in compliance with 2017 Al Sa'fat Dubai Green Building Evaluation System.

Original Issue Date : 25 September 2016

Current Issue Date : 25 September 2020

Valid Until : 24 September 2021

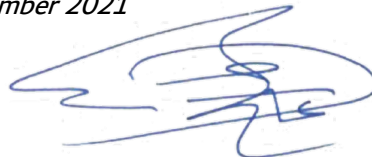

ARIF HUSAIN AL MARZOOQI

Products Conformity Assessment Section Manager
Dubai Central Laboratory Department