

# CERTIFICATE OF PRODUCT CONFORMITY

Dubai Central Laboratory Department (DCLD) of Dubai Municipality  
hereby attests that the product(s)

## PUR/PIR Thermal Insulation

(Details as per the attached Scope of Certification)

manufactured by:


## ROOFINGS MIDDLE EAST FZC

P.O. Box 41905, Hamriyah Free Zone, Sharjah, UAE

have been assessed in accordance with DCLD Document Ref. No. DM-DCLD-RD-DP21-2001 (IC) "General Rules for DM third party product certification system through factory assessment" and the relevant Specific Rules, and were found in conformity with the standard specification:

## BS EN 13165: 2012

Accordingly, DCLD hereby authorizes the above manufacturer  
to affix the DCL Product Conformity Mark on the above-mentioned product(s).

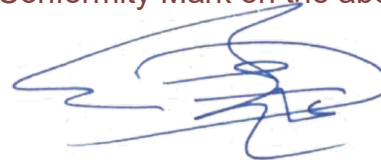

for / ENGR. AMIN AHMED AMIN  
Director, Dubai Central Laboratory Department  
Dubai Municipality



Certificate No: CL11020144  
Valid Until: 26/04/2021



Current Issue Date: 27/04/2020  
Original Issue Date: 27/04/2011

The attached Scope of Certification bearing the same Certificate Number forms an integral part of this Certificate.  
This Certificate is an electronic document subject to the Terms and Conditions of the Product Certification System and shall not be reproduced except in full.

DUBAI CENTRAL LABORATORY DEPARTMENT  
DCL PRODUCT CONFORMITY CERTIFICATION SCHEME

**SCOPE OF CERTIFICATION**  
**FOR CERTIFICATE NO. CL11020144**

<b>Certificate Issued To:</b>	ROOFINGS MIDDLE EAST FZC P.O. Box 41905, Hamriyah Free Zone, Sharjah United Arab Emirates
<b>Applicable Standard Specification:</b>	BS EN 13165:2012 –Thermal insulation products for buildings – Factory made rigid polyurethane (PU) foam products - Specification
<b>Applicable Specific Rules:</b>	DM-DCLD-RD-DP21-2124 (IC) “Specific Rules for Certification of Factory Made Rigid Polyurethane (PU) Foam as per BS EN 13165:2012 through Factory Assessment”.

S/N	Product Description	Brand Name	Product Details
1	Factory made rigid polyisocyanurate (PIR) foam for Sandwich Panel  “CFC Free” (See Note 3)	ROOFING MIDDLE EAST FZC	<u>PIR Insulation Foam</u> Nominal Thickness (min) – 35 mm for wall & 50 mm for roof; Length (min) – 300 mm; Width (min) – 750 mm; Apparent Density -35 kg/m <sup>3</sup> (min); Thermal conductivity (max) k-value (initial) - 0.025 W/(m*K) and k-value (aged) – 0.026 W/(m*K) at 35 °C and 60% RH;  Code: PIR-EN13165-T2-DS(TH)2-CS(10/Y)100-MU7.7  Manufactured with corrugated metal sheet on both sides to be used as thermal insulation sandwich panel

NOTE 1: The above products shall bear the DCL Conformity Mark applied on each individual product.

NOTE 2: This document forms part of the Certificate of Product Conformity bearing the same certificate number.

NOTE 3: In compliance with clause 701.01 (1) of the 2017 AL SA'FAT – Dubai Green Building Evaluation System.

---

DUBAI CENTRAL LABORATORY DEPARTMENT  
DCL PRODUCT CONFORMITY CERTIFICATION SCHEME

**SCOPE OF CERTIFICATION  
FOR CERTIFICATE NO. CL11020144**

Original Issue Date : 27 April 2011

Current Issue Date : 27 April 2020

Valid Until : 26 April 2021



ARIF HUSAIN AL MARZOOQI

Products Conformity Assessment Section Manager

Dubai Central Laboratory Department