

CERTIFICATE OF PRODUCT CONFORMITY

Dubai Central Laboratory Department (DCLD) of Dubai Municipality
hereby attests that the product(s)

Rigid Cellular Polystyrene Thermal Insulation

(Details as per the attached Scope of Certification)

manufactured by:


ELECTRONIC & ENGINEERING INDUSTRIES CO. LLC

ICAD 1, Mussafah, Abu Dhabi, UAE

have been assessed in accordance with DCLD Document Ref. No. DM-DCLD-RD-DP21-2001 (IC) "General Rules for DM third party product certification system through factory assessment" and the relevant Specific Rules, and were found in conformity with the standard specification:

ASTM C578 - 2018

Accordingly, DCLD hereby authorizes the above manufacturer
to affix the DCL Product Conformity Mark on the above-mentioned product(s).

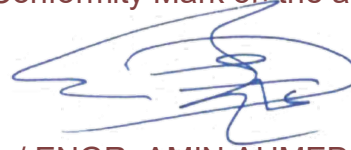

for / ENGR. AMIN AHMED AMIN
Director, Dubai Central Laboratory Department
Dubai Municipality



Certificate No: CL17020463 01
Valid Until: 31/05/2021



Current Issue Date: 01/06/2020
Original Issue Date: 01/06/2017



The attached Scope of Certification bearing the same Certificate Number forms an integral part of this Certificate.
This Certificate is an electronic document subject to the Terms and Conditions of the Product Certification System and shall not be reproduced except in full.

DUBAI CENTRAL LABORATORY DEPARTMENT
DCL PRODUCT CONFORMITY CERTIFICATION SCHEME

SCOPE OF CERTIFICATION
FOR CERTIFICATE NO. CL17020463 (REV. 02)

Certificate Issued To: ELECTRONIC & ENGINEERING INDUSTRIES CO. LLC
ICAD 1, Mussafah, Abu Dhabi, UAE

Applicable Standard Specification: ASTM C 578: 2018 – Standard Specification for Cellular Rigid Polystyrene Thermal Insulation

Applicable Specific Rules: DM-DCLD-RD-DP21-2106 (IC) “Specific Rules for Certification of Rigid Cellular Polystyrene Thermal Insulation as per ASTM C 578: 2018 through Factory Assessment”.

S/N	Product Description	Brand Name	Product Details
1.	Rigid Cellular Extruded Polystyrene Thermal Insulation Board CFC Free (See Note 3)	ROOFMASTER XPS	Size: 1250 x 600 mm Thickness: 25 - 100 mm ASTM Type VI (as per Table 1)
2.	Rigid Cellular Expanded Polystyrene Thermal Insulation Sheet* (Grey Color) CFC Free (See Note 3)	ROOFMASTER EPS	Various Sizes Thickness: 100 mm maximum ASTM Type XI (as per Table 1)

DUBAI CENTRAL LABORATORY DEPARTMENT
DCL PRODUCT CONFORMITY CERTIFICATION SCHEME

SCOPE OF CERTIFICATION
FOR CERTIFICATE NO. CL17020463 (REV. 02)

3.	Rigid Cellular Expanded Polystyrene Thermal Insulation Sheet* (White Color) CFC Free (See Note 3)	ROOFMASTER EPS	Various Sizes Thickness: 100 mm maximum ASTM Type XI (as per Table 1)
4.	Rigid Cellular Expanded Polystyrene Thermal Insulation Sheet* (Grey Color) CFC Free (See Note 3)	ROOFMASTER EPS	Various Sizes Thickness: 100 mm maximum ASTM Type VIII (as per Table 1)
	Rigid Cellular Expanded Polystyrene Thermal Insulation Sheet* (White Color) CFC Free (See Note 3)	ROOFMASTER EPS	Various Sizes Thickness: 100 mm maximum ASTM Type VIII (as per Table 1)

NOTE1: This document forms part of the Certificate of Product Conformity bearing the same certificate number.

NOTE2: The above product shall bear the DCL Conformity Mark.

NOTE 3: CFC Free as per declaration from the company, in accordance with the 2017 Al Sa'fat Dubai Green Building Evaluation System.

NOTE 4: * These products are included in the revision of this Scope of Certification and this document supersedes the one issued last 01 June 2020.

DUBAI CENTRAL LABORATORY DEPARTMENT
DCL PRODUCT CONFORMITY CERTIFICATION SCHEME

SCOPE OF CERTIFICATION
FOR CERTIFICATE NO. CL17020463 (REV. 02)

TABLE 1 (EXTRUDED)
PHYSICAL PROPERTY REQUIREMENTS OF RIGID CELLULAR
POLYSTYRENE THERMAL INSULATION

SN	PROPERTIES	TYPE XII	TYPE X	TYPE XIII	TYPE IV	TYPE VI	TYPE VII	TYPE V
1	COMPRESSIVE RESISTANCE @ yield or 10% deformation, which occurs first, min kPa	104	104	138	173	276	414	690
2	THERMAL RESISTANCE of 25.4 mm thickness, @ mean temp. 35°C and 60% RH min, K-m ² /W	0.77	0.84	0.65	0.84	0.84	0.84	0.84
3	THERMAL CONDUCTIVITY , max, W/m-K @ 35°C and 60% RH	0.0330	0.0303	0.0392	0.0303	0.0303	0.0303	0.0303
4	FLEXURAL STRENGTH , min, kPa	276	276	310	345	414	517	690
5	WATER VAPOR PERMEANCE of 25.4 mm thickness, max, perm	1.5	1.5	1.5	1.5	1.1	1.1	1.1
6	WATER ABSORPTION by total immersion, max volume %	0.30	0.30	1.0	0.30	0.30	0.30	0.30
7	DIMENSIONAL STABILITY (change in dimension), max, %	2.0	2.0	2.0	2.0	2.0	2.0	2.0
8	OXYGEN INDEX , min, volume %	24	24	24	24	24	24	24
9	DENSITY , min, kg/m ³	19	21	26	23	29	35	48

NOTE: The above specification values are extracted from Table 1 of ASTM C578: 2018

DUBAI CENTRAL LABORATORY DEPARTMENT
DCL PRODUCT CONFORMITY CERTIFICATION SCHEME

SCOPE OF CERTIFICATION
FOR CERTIFICATE NO. CL17020463 (REV. 02)

TABLE 2 (EXPANDED)
PHYSICAL PROPERTY REQUIREMENTS OF RIGID CELLULAR
POLYSTYRENE THERMAL INSULATION

SN	PROPERTIES	TYPE XI	TYPE I	TYPE VIII	TYPE II	TYPE IX	TYPE XIV	TYPE XV
1	COMPRESSIVE RESISTANCE @ yield or 10% deformation, which occurs first, min kPa	35	69	90	104	173	276	414
2	THERMAL RESISTANCE of 25.4 mm thickness, @ mean temp. of @ 35°C and 60% RH min, K-m ² /W	0.53	0.60	0.64	0.67	0.71	0.71	0.73
3	THERMAL CONDUCTIVITY , max, W/m·K @ 35°C and 60% RH	0.0482	0.0419	0.0394	0.0377	0.0356	0.0356	0.0347
4	FLEXURAL STRENGTH , min, kPa	70	173	208	240	345	414	517
5	WATER VAPOR PERMEANCE of 25.4 mm thickness, max, perm	5.0	5.0	3.5	3.5	2.5	2.5	2.5
6	WATER ABSORPTION by total immersion, max volume %	4.0	4.0	3.0	3.0	2.0	2.0	2.0
7	DIMENSIONAL STABILITY (change in dimension), max, %	2.0	2.0	2.0	2.0	2.0	2.0	2.0
8	OXYGEN INDEX , min, volume %	24	24	24	24	24	24	24
9	DENSITY , min, kg/m ³	12	15	18	22	29	38	48

NOTE: The above specification values are extracted from Table 1 of ASTM C578: 2018

DUBAI CENTRAL LABORATORY DEPARTMENT
DCL PRODUCT CONFORMITY CERTIFICATION SCHEME

**SCOPE OF CERTIFICATION
FOR CERTIFICATE NO. CL17020463 (REV. 02)**

Original Issue Date: 01 June 2017

Current Issue Date: 09 March 2021

Valid Until: 31 May 2021



ARIF HUSAIN AL MARZOOQI

Products Conformity Assessment Section Manager
Dubai Central Laboratory Department